


SUN COOL
FABRICS

Sundance
Window Coverings


DORUS

OPENNESS FACTOR 4%
SCREEN FABRIC
DECORATIVE

Dorus' understated weave is crafted with a simple micro pattern of beautiful geometric squares that will add subtle texture to any room..




ROLLER
SHADES




ROMAN
SHADES



PANEL
TRACKS



SKYLIGHT
TRACKS

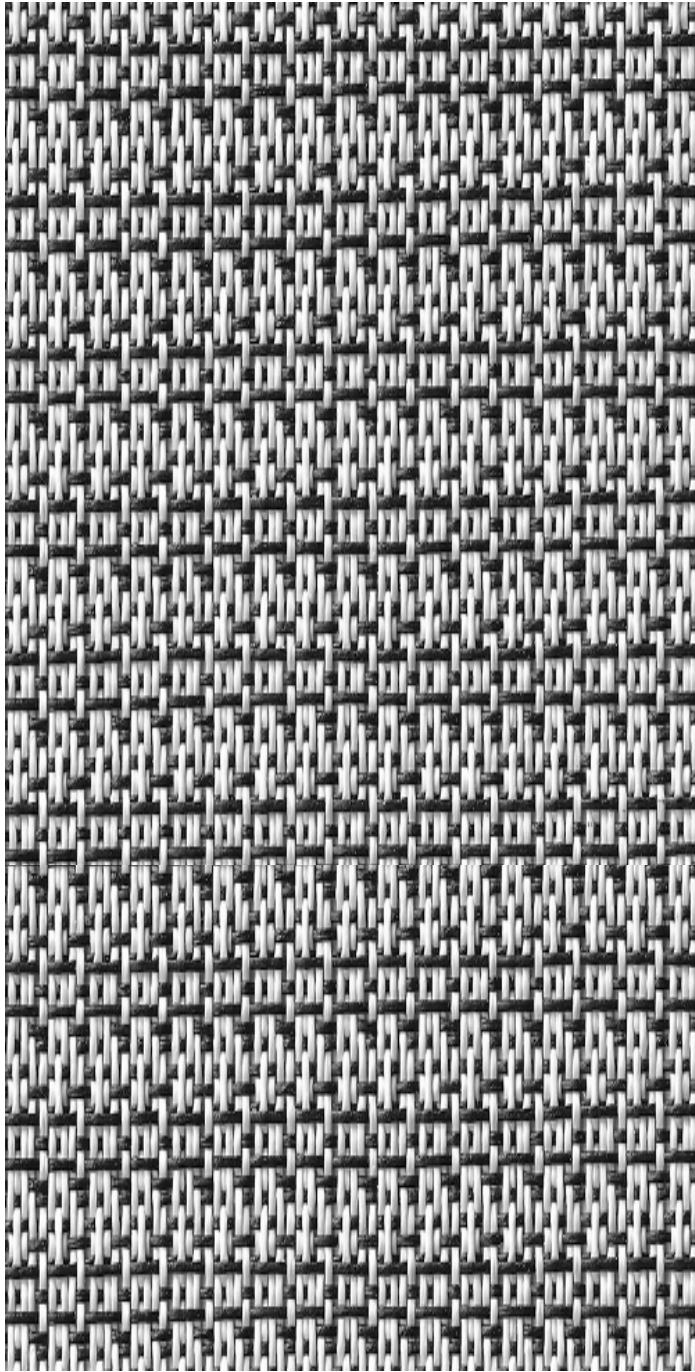


BLACK

SC-DI-405




WHITE

SC-DI-401

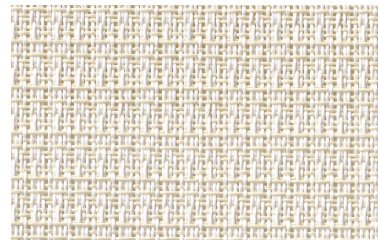


LINEN

SC-DI-402

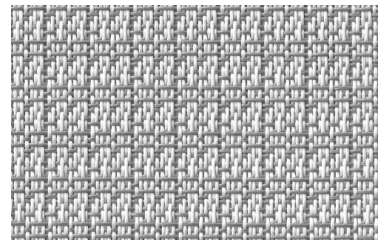

GRAY

SC-DI-403

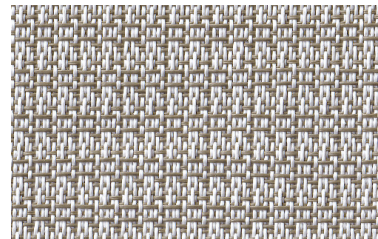

BROWN

SC-DI-404

FABRICATION METHODS

Cutting: Cold Cut, Ultrasonic, Crush Cut or Laser

Seaming / Hemming: Thermal, High-Frequency, Ultrasonic or Sewing.

PRODUCT SPECIFICATIONS

COMPOSITION	30% Polyester + 70% PVC
ROLL WIDTH	118"
ROLL LENGTH	33 yd
WEIGHT / YD ²	12.37 oz/yd ²
THICKNESS	.026" ± 5%
COLOR FASTNESS	8 Grade (SGS)
YARN COUNT	50*40
BREAKING STRENGTH	Warp 1600 N/5cm Weft 1500 N/5cm

CARE AND CLEANING

Remove dust with vacuum cleaner or compressed air. Do not scrub. Do not use solvents or any abrasive substance which might damage the coating on the fabric. Clean with a sponge or a soft brush dipped in soapy water using mild detergent. Rinse with clean water. Leave the shade down until completely dry. You can also rub the fabric very gently with a clean white pencil eraser to remove small stains.

CERTIFICATIONS, TESTS, AND WARRANTY

CALIFORNIA TITLE 19	OEKO-TEX® STANDARD 100	UL GREENGUARD GOLD	ROHS COMPLIANT	10 YEAR WARRANTY	ASTM G-21 & E-2180	NFPA® 701-TM
FLAME RETARDANT	FREE OF HARMFUL CHEMICALS	HEALTHY INDOOR AIR QUALITY	FREE OF HARMFUL METALS	QUALITY GUARANTEED	BACTERIA & FUNGAL RESISTANCE	FIRE RETARDANT

Sundance
Window Coverings